

THE INFORMATION DISCLOSED HEREIN WAS ORIGINATED BY AND IS THE PROPERTY OF BIRK AEROSYSTEMS CORPORATION. BIRK AEROSYSTEMS CORPORATION RESERVES ALL PATENT, PROPRIETARY, DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO.

REV STATUS OF SHEET	REV	-					
	1						


REVISION				
ZONE	REV	DESCRIPTION	DATE	APPROVED
	-	SEE DCN 7668.	15-02-11	BLB

NOTE(S):



- AIR FLOW IN FULLY OPENED POSITION: 40.0 SCFM MINIMUM AT 3.0 INCHES H2O PRESSURE (WITHOUT PLENUM CAP).
- LEAKAGE IN FULLY CLOSED POSITION: .30 CFM MAX. AT 3.0 INCHES H2O PRESSURE.
- FINISH:  
-1: FINE SATIN CLEAR ANODIZE  
-2: FINE SATIN BLACK ANODIZE  
-XX: PER CUSTOMER (EXAMPLE: AV354205-HT101 IS AIR VALVE WITH HIGH-TECH PLATING POLISHED GOLD)
- MAXIMUM WEIGHT: 78.8 GRAMS
- ACCEPTANCE TEST PER ATP AVDT001.

6 PERMANENTLY IDENTIFY WITH THE FOLLOWING:


BAC  
PART NUMBER  
MFG DATE CODE (YYWW)

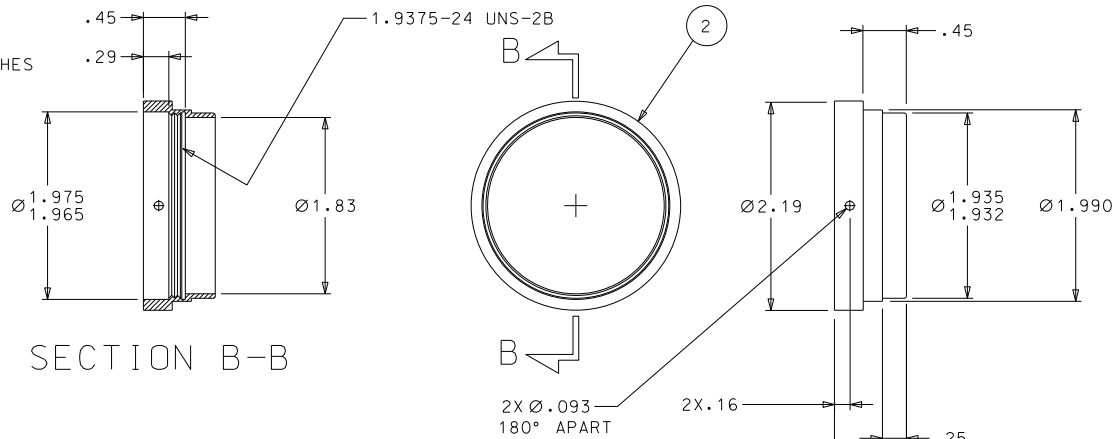

SECTION B-B

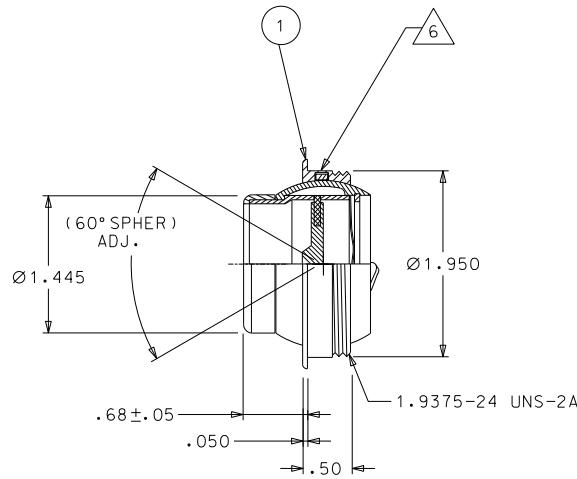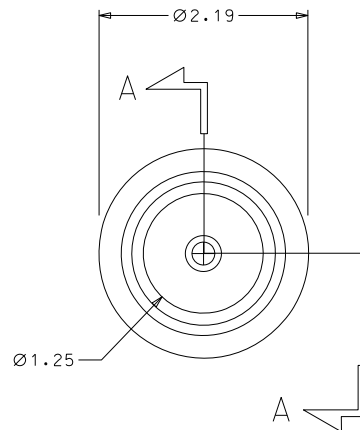

-1, -2, -XX  
SECTION A-A



RECOMMENDED MOUNTING HOLE  
MAXIMUM PANEL THICKNESS: .375

QTY	REV	CAGE CODE	PART OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION	ITEM NO.
1			MN8008-1	MOUNTING NUT	ALUMINUM ALLOY	2
1			354205-XX	AIR VALVE	ALUMINUM ALLOY	1

PARTS LIST		CONTRACT NO.		BIRK AEROSYSTEMS CORPORATION GARDEN GROVE, CALIFORNIA 92843	
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ARE: FRACTIONS DECIMALS ANGLES ±1/32 .XX ±.05 ±1/2° DO NOT SCALE DRAWING MATERIAL SEE PL FINISH SEE NOTE(S) TREATMENT	APPROVALS	DATE	TITLE	SIZE	CAGE CODE
NEXT ASSY USED ON APPLICATION	DRAWN BLB	15-02-11	AIR VALVE, DISC	C	1XE65
	CHECKED JMB	15-02-11	TYPE, 1.25 ID	DWG NO.	AV354205
	ENGR BLB	15-02-11		REV.	-
	ISSUED CLB	15-02-11		SCALE	1/1
	FILE NO. AV354205/PV			WT.	
				SHEET	1 OF 1